

Description

Standard thermal paper. Bisphenol A (BPA) free.

Sensitivity: Standard.

Image Durability: 7 years at correct handling and storage conditions for thermal paper.

End uses

ATM receipts, Bank statements, Coupons, Faxes, Kiosks, Medical charts, POS receipts

Print methods

Flexo

Certificates

- [FSC Chain of Custody \(multisite\)](#)
- [PEFC Chain of Custody \(multisite\)](#)
- [EMAS Leitza mill](#)
- [ISO 14001](#)
- [ISO 50001 Energy Efficiency](#)
- [ISO 9001 Quality](#)
- [OHSAS 18001 \(multisite\)](#)



Physical Properties

Property	Test Method	Unit	Value	Tolerance
Substance	ISO 536	g/m ²	65	± 4%
		lbs (17x22-500 sheets)	17.3	
Thickness	ISO 534	µm	73	± 5
		mils	2.87	± 0.2
Bekk smoothness	ISO 5627	s	300	≥ 200
Brightness	ISO 2470	%	≥ 86	-
Tensile strength CD	ISO 1924-2	kN/m	2	-0.5
Tensile strength MD	ISO 1924-2	kN/m	3.3	-1.0

Stability Properties

Property	Conditions	Image Stability	Paper Stability
Heat resistance	60°C, 30% HR, 24h	≥ 70%	≤ 0.15 D.O.
Humidity resistance	40°C, 90% HR, 24h	≥ 70%	≤ 0.15 D.O.
Light resistance	5.000 Lux, 100h	≥ 90%	≤ 0.12 D.O.

Image Sensitivity

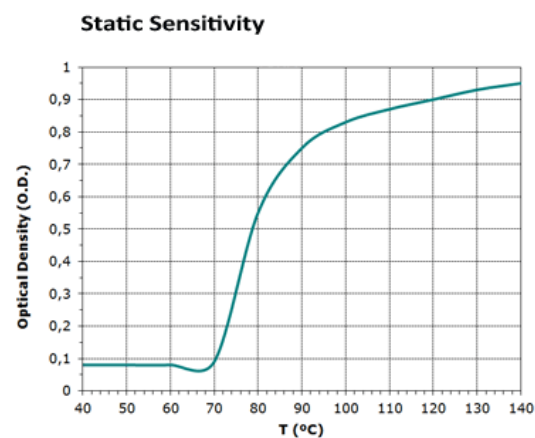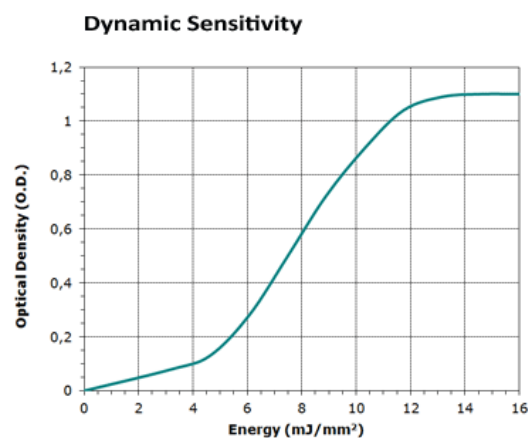

Values are subject to change without notice.
Last update: 06/18/2018